



Steel Grating Dimension&Tolerance




Bearing bars verticality no more than 10% of their width Cross bar location: cross bars shall not be higher than bearing bars top 1mm and ends beyond grating side shall not be greater than 2mm

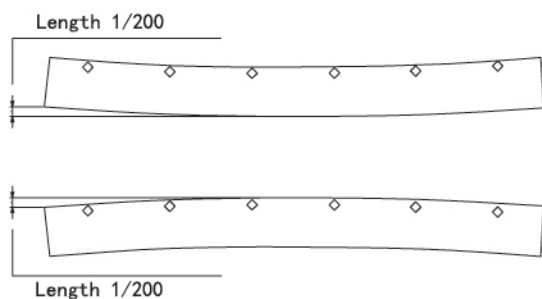


Grating longitudinal bow shall not be more than 1/200 of the length

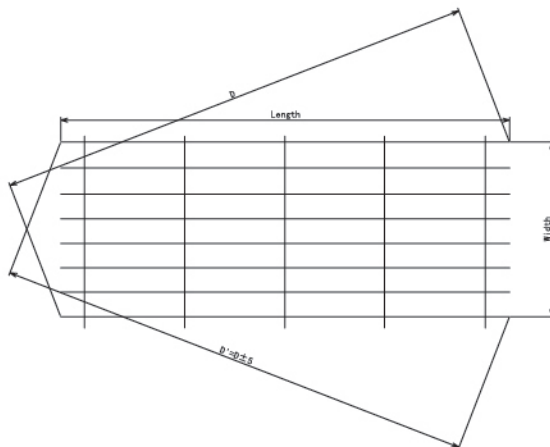

Grating length allowable deviation + 0 ~ 5 mm, width deviation ± 5 mm
Diagonal allowable deviation less than 5mm

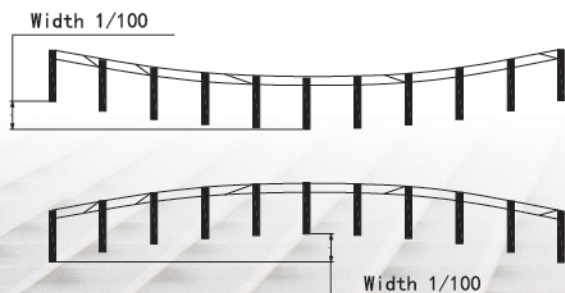

Grating transverse bow shall not be more than 1/100 of the width

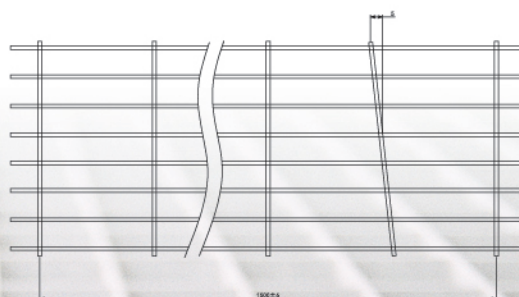

Cross bar shall not vary more than 5mm in either direction from perpendicular alignment with bearing bars and spacing shall not vary more than $\hat{e}$ mm in 1.5m length

